Nero

Opal Wall Basin/Bath Mixer

SPECIFICATION

PRODUCT CODE	YSW2519-07B
WELS RATING	5Star 6L/Min
WATERMARK LICENSE	WM-060073
TEMPERATURE RATING	Min 1℃-Max 75℃
PERSSURE RATING	Min 150KPa-Max 500Kpa

AVAILABLE FINISH

GRAPHITE
NR251907bGR

BRUSHED NICKEL
NR251907bBN

BRUSHED BRONZE
NR251907bBZ

BRUSHED GOLD
NR251907bBG



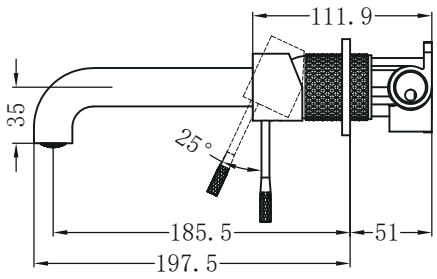

MAINTENANCE AND CARE

All surfaces should be cleaned with mild liquid detergent or soap and water. Do not use cream cleaners or citrus based cleaning products, as they are abrasive. Use of unsuitable cleaning agents may damage the surface.Any damage caused in this way will not be covered by warranty

PACKING INCLUDES

-1x mixer body
-1x handle
-1x spout
-1x plate
-1x accessories pouch
-1x aerator driver
-1x none restricted aerator

15 YEARS WARRANTY 15

WaterMark
AS/NZS 3718
WM-060073

WATER RATING 6.0 litres per minute

IMPORTANT: Please read all of the instructions before installation.

General:

1. Nero recommends this product is installed by a licensed plumber in compliance with all relevant regional regulations.
2. Do not hydrostatic test the installation with this mixer installed. Damage to the ceramic cartridge may occur.
3. All pipe work must be thoroughly flushed prior to the installation of the mixer.
4. Do not remove the ceramic cartridge from the mixer when installing.
5. After installation all connections must be checked for leaks.
6. All outlets used primarily for personal hygiene shall deliver water at a safe temperature as per regional regulations.
7. This mixer is not recommended for use in uncontrolled heating systems such as wet-backs or solar heating units unless a suitable tempering valve is fitted.
8. It is the responsibility of the installer to ensure a waterproof seal is achieved between the product and mounting surface. If in doubt about the quality of the seal, remove the product and reinstall.

Steps:

Diagram 1A

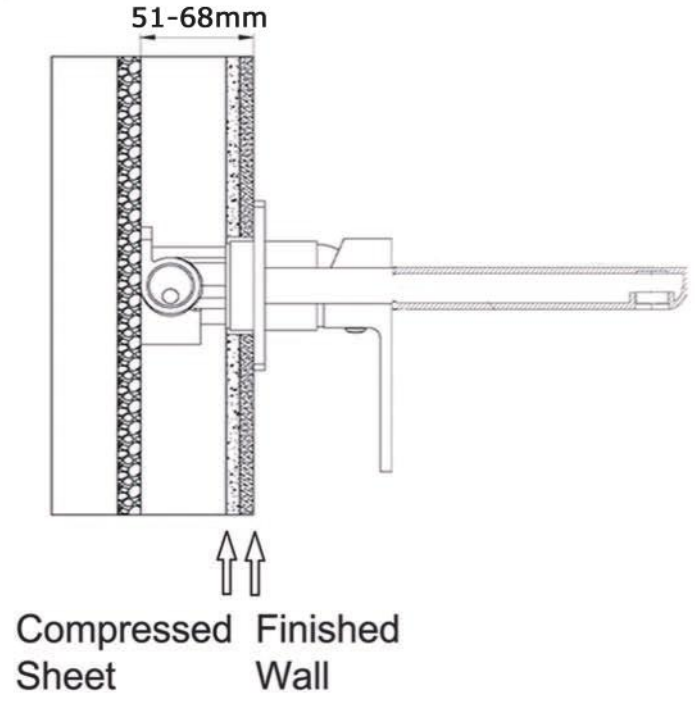

1. Proceed to mount complete assembly refer to above diagram 1A for setting assembly depth.
2. Connect hot and cold pipes to concealed valve.
3. Pressure test for leaks.
4. Water proof installation then proceed to fit off decorating plate, spout and handle.