





A



B

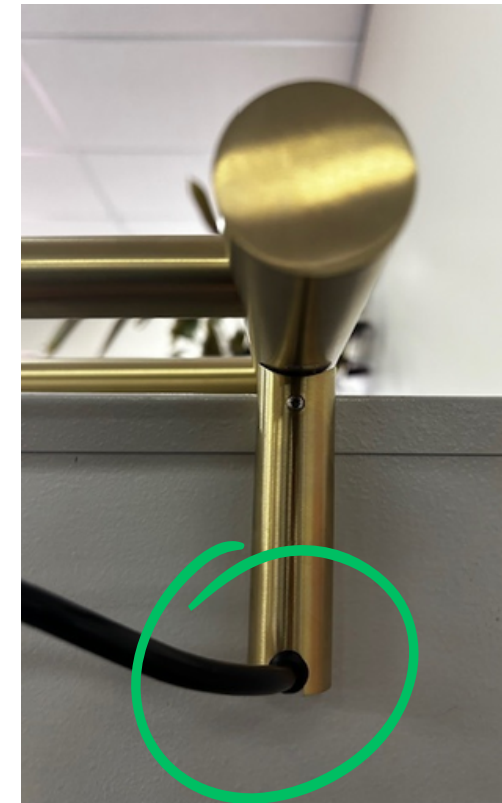

C

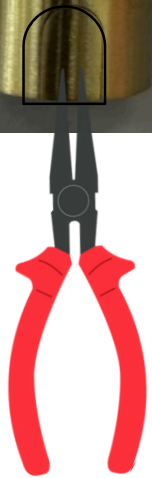

- A • If installing HTR with plug supplied – Choose the side of the HTR that you will be attaching the wiring (Closest to Power Point)
 - B • Take pliers and bend & remove the pre marked "arch cutout" on the leg that you will be attaching the cabling.
 - C • Once arch is removed, then attach the screw-in wiring, bending the cable and inserting rubber grommet so no damage occurs to cable.
- Plug and play your new HTR